

**PENNCO**   
**SILVER**  
CAST IRON BOILERS

**16 Series**  
Gas-Fired Steam Boiler



**Standard Equipment:**

- Assembled Boiler with insulated Jacket
- Completely installed and wired gas control system consisting of:
  - Titanium Composite Burners
  - Gas Manifold with Orifices
  - Automatic Redundant Combination Gas Valve, 24 Volt, with Pilot Filter and Regulator
  - Intermittent Pilot Control
  - Continuous Retry 100% Shut-Off
  - Combination Pilot Burner/Electrode/Flame Sensor and Integral Draft Diverter
- 24 Volt Transformer
- Flame Roll-Out Safety Shut-Off Fuse Link (Roll-Out Switch) and Blocked Vent Safety Shut-Off Manual Reset Disc Thermostat (Spill Switch) with Spare Fuse Link included.
- Electronic Low Water Cut-Off with 3/4" Probe
- Pressure Limit Control
- Steam Pressure Gauge
- Glass Water Level Gauge
- 3/4" Boiler Drain Valve
- 15 psi ASME Pop Safety Valve
- (2) 2 1/2" Supply Tappings
- (2) 2 1/2" Return Tappings
- (2) 2 1/2" Square Head Pipe Plugs — to plug unused supply and return tappings.

**Optional:**

- Natural Gas or Propane models available.
- Combustible Floor Plate
- Electronic Water Feeder

*The Pennco 16 Series is available in 7 sizes from 75 to 299 MBH. The 16 Series features an integral Draft Hood and Vent Damper. It's low profile, compact design makes it ideal for low clearance installations.*

**Quality Heat Exchanger Design —**

The 16 Series features a dependable cast iron heat exchanger with cast iron push nipples. The sections and push nipples expand at the same rate when heated. By using similar materials instead of less expensive gaskets, the boiler maintains a water tight seal over time.

**Efficiency —** The 16 Series provides an annual fuel utilization efficiency of up to 82.7% as certified by the US Department of Energy.


**Warranty —** 10 Year Limited Warranty (Residential Applications)

**Made in the USA.**


**Pennco SILVER makes Simple Comfort, Affordable.**

# 16 Series


## Gas-Fired Steam Boiler



LEFT SIDE



FRONT

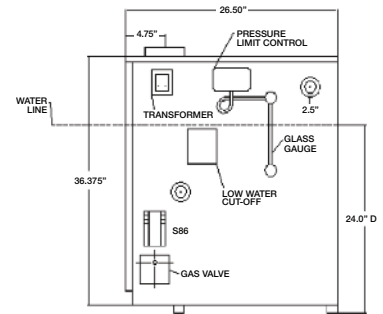

RIGHT SIDE

### Specifications: *(All ratings and specifications subject to change)*

Model	Input Rate Nat./LP (MBH) <sup>(1)</sup>	Heating Capacity Nat./LP (MBH) <sup>(1)</sup>	Net AHRI Rating Nat./LP <sup>(2)</sup>			No. of Sec.	Vent Pipe Size	AFUE %
			Steam (PPF)	Steam (Sq. Ft.)	Steam (MBH)			
1603HSID	75/70	62/58	1.33	196/183	47/44	3	5"	82.7%
1604HSID	112.5/105	91/85	1.33	283/267	68/64	4	6"	82.0%
1605HSID	150/140	122/114	1.33	383/358	92/86	5	6"	82.0%
1606HSID	187.5/175	153/143	1.33	479/446	115/107	6	7"	82.0%
1607HSID	225/210	183/171	1.33	571/533	137/128	7	7"	82.0%
1608HSID	262.5/245	214/200	1.33	671/625	161/150	8	7"	82.0%
1609HSID	299/280	245/229	1.33	767/717	184/172	9	7"	82.0%

Heating Capacity and AFUE are based on DOE (Department of Energy) test procedures.

(1) Input rating for sea level to 2,000 ft. above sea level. Altitudes over 2000 ft. above sea level, reduce input rate 4% for every 1000 ft.

(2) Net AHRI steam ratings shown are based on a piping and pickup allowance of 1.333. Consult manufacturer before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.



# PENNCO



2201 Dwyer Avenue, Utica, New York 13501  
 Phone: 315-797-1310 • Fax: 866-432-7329  
 E-mail: info@ecrinternational.com  
 Web: www.pennco boilers.com

**USA Contractor Assistance:**  
**800-325-5479**