

Residential Water Boilers

PENNCO 
SILVER
CAST IRON BOILERS

KWC Series
Oil-Fired Hot Water Boiler



The Pennco KWC Series Boiler is an Affordable Oil-Fired Home Heating Solution

Quality Heat Exchanger Design:

The KWC Series features a dependable cast iron heat exchanger with cast iron push nipples. The sections and push nipples expand at the same rate when heated. By using similar materials instead of less expensive gaskets or materials, the boiler maintains a water tight seal.

Swing Burner Door:

Provides easy access for servicing and maintaining the burner/boiler.

Efficiency:

The KWC Series provides an annual fuel utilization efficiency (AFUE) of up to 86.2% as certified by the US Department of Energy.

Residential Warranty:

20 Year Limited Warranty (Residential)


Pennco SILVER makes *Simple Comfort, Affordable.*

www.pennco boilers.com
PN 240009812 [04/19/22]

Oil-Fired Hot Water Boiler

Standard Equipment:

- Assembled boiler with insulated jacket
- Completely installed and wired Beckett AFG Series Oil Burner equipped with:
 - Oil Nozzle
 - Primary Control
 - CAD Cell
 - PSC Motor
 - Interrupted Duty Ignition and Clean Cut Pump
- Flue Brush
- Target Wall (Vacuum Formed Refractory Ceramic Fiber)
- DuraBlanket Insulation Chamber
- Barometric Draft Control 6"
- Combination Temperature/Pressure gauge
- Pre-wired 5' pump harness for supply or return mounting in the field
- 3/4" Boiler Drain Valve
- 30 psi ASME Relief Valve

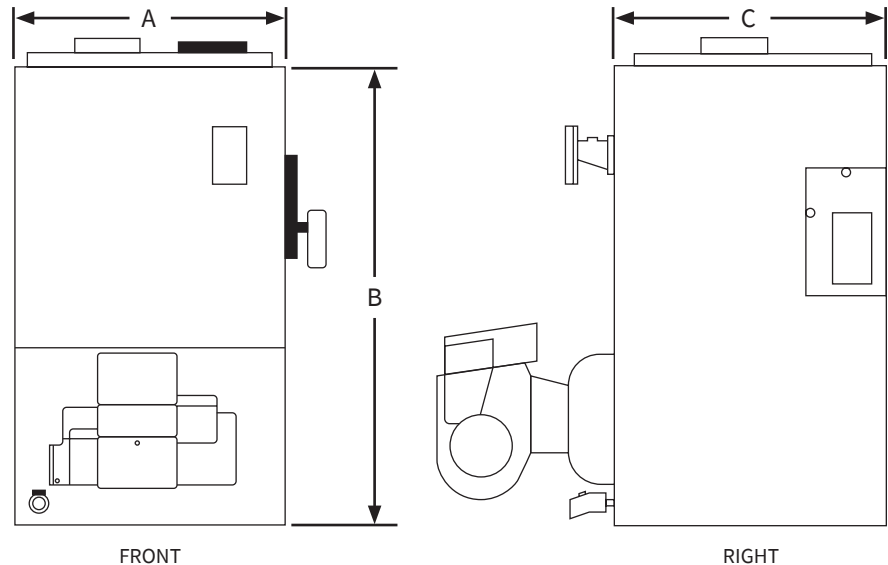

Specifications:

Model	Firing Rate GPH	Input MBH ⁽¹⁾	Heating Capacity MBH ⁽¹⁾⁽²⁾	Net AHRI Rating Water MBH ⁽¹⁾⁽³⁾	AFUE ⁽²⁾	Dimensions (Inches)			Min. Chimney Size/Height ⁽⁵⁾	Number of Sections	Tankless Rating GPM ⁽⁴⁾
						- A - Width	- B - Height	- C - Depth			
3KWC0.80(T)	0.80	112	98	85	86.0%	20 1/2"	36"	14 1/2"	8"x8"x15'	3	3.05
4KWC1.00(T)	1.00	140	122	106	86.2%	20 1/2"	36"	17 3/4"	8"x8"x15'	4	3.25
4KWC1.25(T)	1.25	175	152	132	86.0%	20 1/2"	36"	17 3/4"	8"x8"x15'	4	3.50
5KWC1.35(T)	1.35	189	167	145	86.0%	20 1/2"	36"	21"	8"x8"x15'	5	3.60
5KWC1.55(T)	1.55	217	189	164	86.0%	20 1/2"	36"	21"	8"x8"x15'	5	3.80

(1) MBH = 1000 Btu/hr (British Thermal Units Per Hour)

(2) Heating capacity and AFUE (Annual Fuel Utilization Efficiency) are based on DOE (Department of Energy) test procedure.

(3) Net AHRI ratings shown are based on piping allowance of 1.15. Consult manufacturer before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.

(4) Capacity GPM applies to (T) models with a tankless coil (T).

(5) Refer to IOM and vent pipe manufacturer's instructions for equivalent lengths and approved venting materials.

www.pennco boilers.com



ECR International, Inc. 2201 Dwyer Avenue, Utica, NY 13501
Tel. 800 253 7900
www.ecrinternational.com

All specifications subject to change without notice.
©2022 ECR International, Inc.
PN 240009812 Rev. [04/19/22]